

## PFI 60 Power Take-Off

Maximum torque 600 Nm (443 lb-ft)

The Technodrive PFI 60 gives you broad coverage in rugged-duty, high-horsepower hydraulic PTOs. The compact but powerful PFI 60 can mount to an engine, remote mount with shaft input, mount to the input or output of our pump drives, and have a shaft or pump mounting pad as options.


### SPECIFICATIONS

- Multiple disc clutch in oil bath
- Hydraulically operated with 24V DC solenoid selector for remote control
- Input cylindric shaft, output cylindric shaft, or female splined shaft for hydraulic pump connection
- SAE #3, #2, or #1 housing, or free-standing mounting possibilities
- Right or left hand input rotation
- Oil cooling by an external heat exchange


### TECHNICAL DATA

<b>Maximum torque</b>	600 Nm (443 lb-ft)
<b>Maximum speed</b>	3200 rpm
<b>Weight</b>	80 kg (176 lbs)

*PTO selection is to be made multiplying the net input power by the service factor: 1.0 for centrifugal pumps; 1.3 for hydraulic pumps; 1.5 for direct winch drivers; 2.0 for crushers. The resulting power is to be below the line on the graph.*

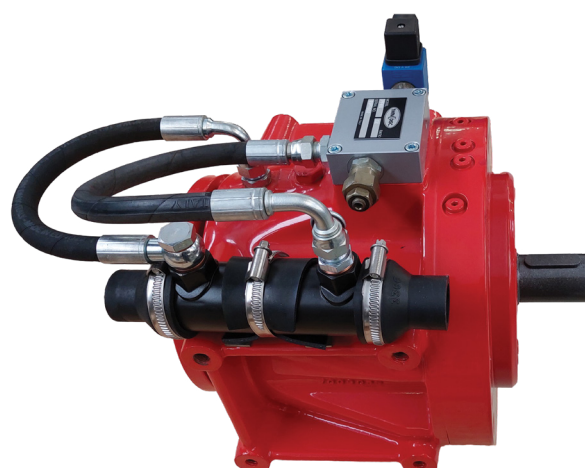

### POWER CURVE

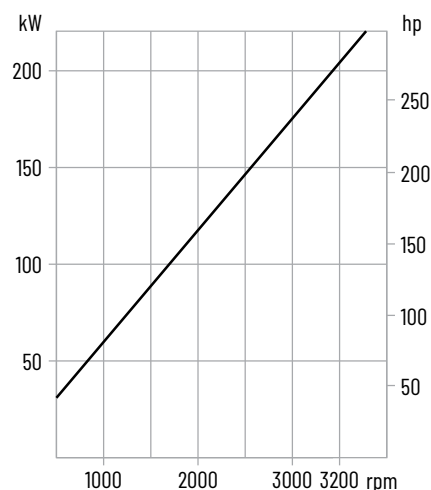

Dimensions are in mm.

2503\_Bulletin\_PFI60  
© 2025, Twin Disc, Incorporated